

# Product Specification

25.78Gb/s LR SFP28 1310nm 10km  
Optical Transceiver

P/N: 25G-SFP-LR



## Features

- Hot Pluggable SFP28 form factor
- Operating data rate 25Gbps
- Single +3.3V power supply
- Duplex LC connector
- Max power dissipation <1.2W
- Up to 10km transmission distance
- 1310nm DFB
- PIN receivers
- Built-in digital diagnostic function
- Very low EMI and excellent ESD protection
- Commercial temperature range 0°C to 70°C

## Compliance

- SFP MSA
- Compliant with SFP+ Electrical MSA SFF-8431
- Compliant with SFP+ Mechanical MSA SFF-8432
- SFF-8472
- IEEE 802.3ae
- RoHS

## Applications

- Switches with SFP+ ports
- Router with SFP+ Ports
- Server or Network Adapter Card
- Optical Transmission System
- Other devices with SFP+ Ports

## Description

The 25G-SFP-LR is a high-performance, single-mode optical transceiver module designed for 25 Gigabit Ethernet applications. It supports data rates of up to 25.78 Gbps and is optimized for long-reach communication, with a maximum transmission distance of up to 10 kilometers over single-mode fiber (SMF). This SFP28 module operates at a wavelength of 1310nm, making it ideal for data center interconnects, enterprise networks, and telecommunications infrastructure. Its duplex LC interface ensures seamless integration into existing network setups, providing reliable and efficient data transmission.

The 25G-SFP-LR is fully compliant with industry standards, including SFF-8472, SFF-8431, and SFF-8432, ensuring interoperability with a wide range of networking equipment. It features advanced digital diagnostics monitoring (DDM) capabilities, accessible via a 2-wire serial interface, enabling real-time monitoring of key parameters such as temperature, voltage, and optical power. With low power consumption and a compact SFP28 form factor, the 25G-SFP-LR is a cost-effective and energy-efficient solution for high-speed networking needs. Its robust design and compliance with environmental standards make it a dependable choice for modern network operators seeking to enhance their infrastructure with reliable, high-performance connectivity.

## Product performance Specifications

### 1、 Basic Product Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit
Storage Temperature	$T_s$	-40	-	+85	°C
Supply Voltage	$V_{CC}$	-0.5	-	3.63	V
Relative Humidity	RH	5	-	85	%
Operating Case Temperature	$T_c$	0	25	70	°C
Power Supply Voltage	$V_{CC}$	3.135	3.3	3.465	V
Power Supply Current	$I_{CC}$			300	mA
Power Dissipation	PD	-	-	1200	mW
Data Rate	DR	9.8304	24.33024	25.78125	Gbps
Transmission Distance				10	km

### 2、 Product Optical and Electrical Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit
<b>Optical Interface Parameters</b>					
Center Wavelength	$\lambda_c$	1295	1310	1325	nm
RMS Spectral Width	$\sigma$			0.45	nm
Optical Power for TX DISABLE	$P_{off}$			-30	dBm

Output average power	$P_{AVG}$	-4		2	dBm
Optical Modulation Amplitude	OMA	-4		2.2	dBm
Extinction Ratio	ER	3.5			dB
Relative Intensity Noise	RIN			-130	dB/Hz
Optical Return Loss Tolerance	ORL			20	dB
Transmitter Dispersion Penalty	TDP			2.7	dB
Optical Eye Mask				>5%	
Tx Input Diff Voltage	VI	180	500	900	mV
Tx Fault	VoL			0.4	V
	VOH	$V_{CC}T-0.4$			
Tx_Disable	VIL	-0.3		0.8	V
Eye Height @ BER=1e-15	EH15	95			mV
Eye width @ BER=1e-15	EW15	0.46			UI
Optical Eye Mask Definition {X1,X2,X3,Y1,Y2,Y3}, 25Gbase_LR				{0.31, 0.4, 0.45, 0.34, 0.38, 0.4}	
<b>Optical Interface Parameters</b>					
Center Wavelength	$\lambda C$	1295	1310	1325	nm
Receiver Stress Sensitivity, OMA				-8.8	dBm
Receiver Sensitivity, Average Power				-12	dBm
Receiver Sensitivity, OMA				-12	dBm
LOS Assert	LosA	-30			dBm
LOS Dessert	LosD			-16	dBm
LOS Hysteresis	LosH	0.5			dB
Saturation Input Power	Pin	2			dBm
Receiver Reflectance				-26	dB
Rx Output Diff Voltage	Vo	450	600	750	mV
Rx Output Rise and Fall Time	Tr/Tf	9.5			ps
Eye Height @ BER=1e-15	EH15	228			mV
Eye Width @ BER=1e-15	EW15	0.57			UI
Vertical Eye Closure	Vc			5.5	dB
RX LOS enable/disable				Enable	
LOS Criterion				Average power	

**Note1:** Measured with 25.78125Gb/s, 24.33024Gb/s, PRBS-31 NRZ, ER > 3.5dB, 1295~1325nm, BER < 5E-5 Measured with 9.8304Gb/s, 10.1376Gb/s, 10.3125Gb/s, PRBS-31 NRZ, ER > 3.5dB, 1295~1325nm, BER < 1E-12

**Note2:** Under CDR bypass mode, 9.8304Gb/s, 10.1376Gb/s, 10.3125Gb/s compatibility

**Note3:** PRBS31 Pattern with Default Emphasis 1dB at 24.33024Gbps and 25.78125Gbps; when data rate turns to 9.8304Gbps, 10.1376Gbps, 10.3125Gbps application, the output emphasis automatically change to 0 dB.

**Note4:** Rx Output Squelched on LOS.

## Recommended Host Board Power Supply Circuit

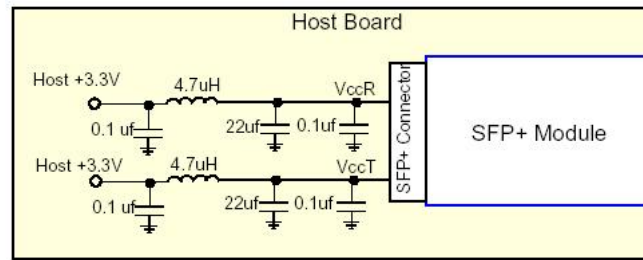


Figure 1: Recommended Host Board Power Supply Circuit

## Recommended Interface Circuit

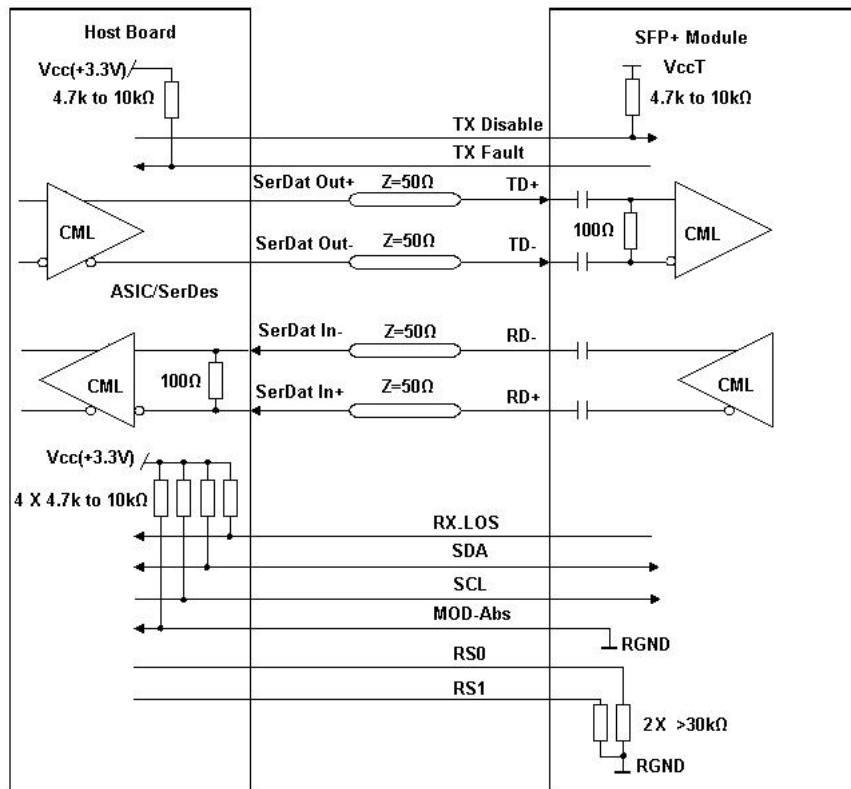


Figure 2: Recommended Interface Circuit

## Pin-out Definition

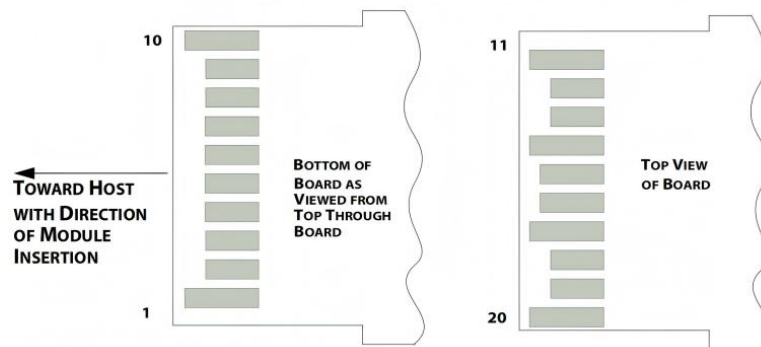


Figure3:Pin view

## Pin Function Definitions

Pin	Logic	Symbol	Description	Note
1		VeeT	Module Transmitter Ground	1
2	LVTTL-O	TX_Fault	Module Transmitter Fault	2
3	LVTTL-I	TX_Disable	Transmitter Disable; Turns off transmitter laser output	3
4	LVTTL-I/O	SDA	2-wire Serial Interface Data Line (Same as MOD-DEF2 as defined in the INF-8074i)	4
5	LVTTL-I/O	SCL	2-wire Serial Interface Clock (Same as MOD-DEF1 as defined in the INF-8074i)	4
6		MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	5
7	LVTTL-I	RS0	Adaptive multi-rate operation	6
8	LVTTL-O	RX_LOS	Receiver Loss of Signal Indication (In FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated at Signal Detect)	2
9	LVTTL-I	RS1	Adaptive multi-rate operation	6
10		VeeR	Module Receiver Ground	1
11		VeeR	Module Receiver Ground	1
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Non-Inverted Data Output	
14		VeeR	Module Receiver Ground	1
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Transmitter 3.3 V Supply	
17		VeeT	Module Transmitter Ground	1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	1

- Note1:**The module signal ground pins, VeeR and VeeT, shall be isolated from the module case.
- Note2:**This pin is an open collector/drain output pin and shall be pulled up with 4.7kΩ-10kΩ to Host\_Vcc on the host board. Pull ups can be connected to multiple power supplies, however the host board design shall ensure that no module pin has voltage exceeding module VccT/R + 0.5V.
- Note3:**This pin is an open collector/drain input pin and shall be pulled up with 4.7kΩ-10kΩ to VccT in the module.
- Note4:**See SFF-8431 4.2 2-wire Electrical Specifications.
- Note5:**This pin shall be pulled up with 4.7kΩ-10kΩ to Host\_Vcc on the host board.
- Note6:**Connect with 30kΩ load pulled down to GND in the module.

## Monitoring Specification

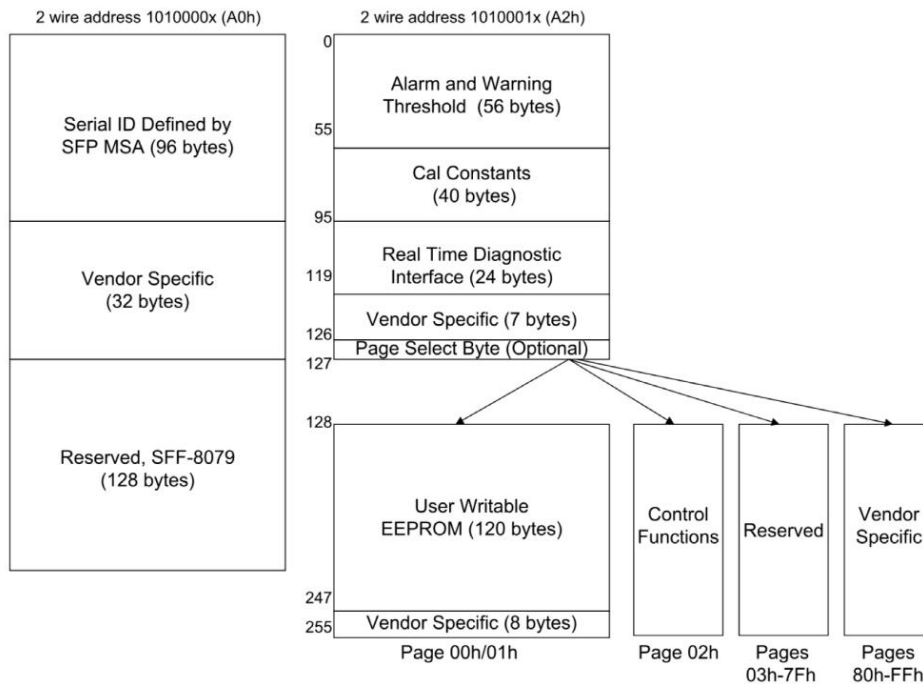


Figure4:Memory map

## Memory map Table


Byte	Unit	Name	Description
<b>A0h ID Fields</b>			
0	1	Identifier	Type of transceiver
1	1	Ext. Identifier	Extended identifier of type of transceiver
2	1	Connector	Code for connector type
3-10	8	Transceiver	Code for electronic or optical compatibility
11	1	Encoding	Code for high speed serial encoding algorithm
12	1	Signaling Rate, Nominal	Nominal signaling rate, units of 100 MBd.
13	1	Rate Identifier	Type of rate select functionality

14	1	Length (SMF,km) or Copper Cable Attenuation	Link length supported for single-mode fiber, units of km, or copper cable attenuation in dB at 12.9 GHz
15	1	Length (SMF) or Copper Cable Attenuation	Link length supported for single-mode fiber, units of 100 m, or copper cable attenuation in dB at 25.78 GHz
16	1	Length (50 um, OM2)	Link length supported for 50 um OM2 fiber, units of 10 m
17	1	Length (62.5 um, OM1)	Link length supported for 62.5 um OM1 fiber, units of 10 m
18	1	Length (OM4 or copper cable)	Link length supported for 50um OM4 fiber, units of 10 m. Alternatively, copper or direct attach cable, units of m
19	1	Length (OM3) or Cable length, additional	Link length supported for 50 um OM3 fiber, units of 10 m. Alternatively, copper or direct attach cable multiplier and base value
20-35	16	Vendor name	SFP vendor name (ASCII)
36	1	Transceiver	Code for electronic or optical compatibility
37-39	3	Vendor OUI	SFP vendor IEEE company ID
40-55	16	Vendor PN	Part number provided by SFP vendor (ASCII)
56-59	4	Vendor rev	Revision level for part number provided by vendor (ASCII)
60-61	2	Wavelength	Laser wavelength (Passive/Active Cable Specification Compliance)
62	1	Fibre Channel Speed 2	Transceiver's Fibre Channel speed capabilities
63	1	CC_BASE	Check code for Base ID Fields (addresses 0 to 62)
64-65	2	Options	Indicates which optional transceiver signals are implemented
66	1	Signaling Rate, max	Upper signaling rate margin, units of %
67	1	Signaling Rate, min	Lower signaling rate margin, units of %
68-83	16	Vendor SN	Serial number provided by vendor (ASCII)
84-91	8	Date code	Vendor's manufacturing date code
92	1	Diagnostic Monitoring Type	Indicates which type of diagnostic monitoring is implemented (if any) in the transceiver
93	1	Enhanced Options	Indicates which optional enhanced features are implemented (if any) in the transceiver
94	1	SFF-8472 Compliance	Indicates which revision of SFF-8472 the transceiver complies with.
95	1	CC_EXT	Check code for the Extended ID Fields (addresses 64 to 94)
96-127	32	Vendor Specific	Vendor Specific EEPROM
128-255	128	Reserved	Reserved (was assigned to SFF-8079)
<b>A2h ID Fields</b>			
00-01	2	Temp High Alarm	MSB at low address
02-03	2	Temp Low Alarm	MSB at low address
04-05	2	Temp High Warning	MSB at low address
06-07	2	Temp Low Warning	MSB at low address
08-09	2	Voltage High Alarm	MSB at low address
10-11	2	Voltage Low Alarm	MSB at low address
12-13	2	Voltage High Warning	MSB at low address
14-15	2	Voltage Low Warning	MSB at low address

16-17	2	Bias High Alarm	MSB at low address
18-19	2	Bias Low Alarm	MSB at low address
20-21	2	Bias High Warning	MSB at low address
22-23	2	Bias Low Warning	MSB at low address
24-25	2	TX Power High Alarm	MSB at low address
26-27	2	TX Power Low Alarm	MSB at low address
28-29	2	TX Power High Warning	MSB at low address
30-31	2	TX Power Low Warning	MSB at low address
32-33	2	RX Power High Alarm	MSB at low address
34-35	2	RX Power Low Alarm	MSB at low address
36-37	2	RX Power High Warning	MSB at low address
38-39	2	RX Power Low Warning	MSB at low address
40-41	2	Optional Laser Temp High Alarm	MSB at low address
42-43	2	Optional Laser Temp Low Alarm	MSB at low address
44-45	2	Optional Laser Temp High Warning	MSB at low address
46-47	2	Optional Laser Temp Low Warning	MSB at low address
48-49	2	Optional TEC Current High Alarm	MSB at low address
50-51	2	Optional TEC Current Low Alarm	MSB at low address
52-53	2	Optional TEC Current High Warning	MSB at low address
54-55	2	Optional TEC Current Low Warning	MSB at low address
56-91	36	Ext Cal Constants or Additional Enhanced Features	Diagnostic calibration constants for optional External Calibration if External Calibration bit, A0h, byte 92, bit 4 is 1 Additional Enhanced Features advertisement, control and status if External Calibration bit, A0h, byte 92, bit 4 is 0
92-94	3	Reserved	
95	1	CC_DMI	Check code for Base Diagnostic Fields (addresses 0 to 94)
96-105	10	Diagnostics	Diagnostic Monitor Data (internally or externally calibrated)
106-109	4	Optional Diagnostics	Monitor Data for Optional Laser temperature and TEC current
110	1	Status/Control	Optional Status and Control Bits
111	1	Reserved	Reserved (was assigned to SFF-8079)
112-113	2	Alarm Flags	Diagnostic Alarm Flag Status Bits
114	1	Tx Input EQ control	Tx Input equalization level control
115	1	Rx Out Emphasis control	Rx Output emphasis level control
116-117	2	Warning Flags	Diagnostic Warning Flag Status Bits
118-119	2	Ext Status/Control	Extended module control and status bytes
120-126	7	Vendor Specific	Vendor specific memory addresses
127	1	Table Select	Optional Page Select

128-247	120	User EEPROM	User writable non-volatile memory
248-255	8	Vendor Control	Vendor specific control addresses
<b>A2h Page 02h</b>			
128-129	2	Reserved	Reserved for SFF-8690 (Tunable Transmitter)
130	1	Reserved	Reserved for future receiver controls
131	1	Rx Decision Threshold	RDT value setting
132-172	41	Reserved	Reserved for SFF-8690
173-255	83	Reserved	Reserved

### Mechanical Dimension

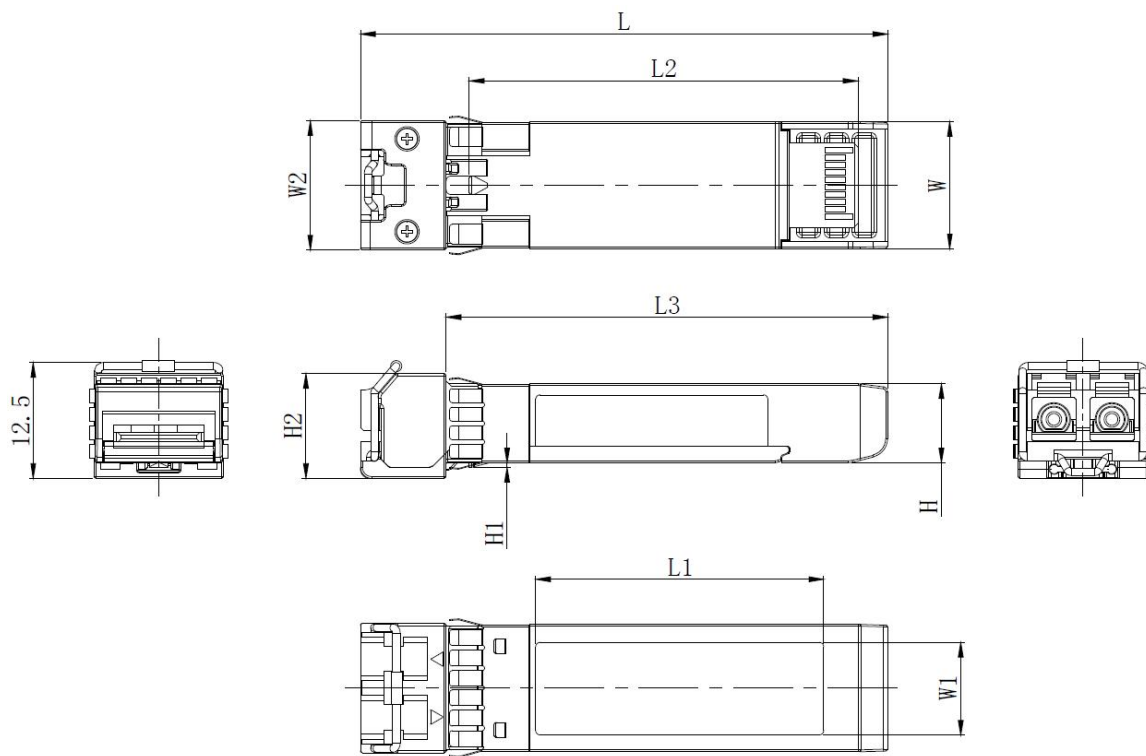


Unit: mm

	L	L1	L2	L3	W	W1	W2	H	H1	H2
MAX	56.9	31.2	41.95	47.7	13.8	10.2	14.0	8.6	0.6	11.5
Typical	56.7	31.0	41.80	47.5	13.7	10.0	-	8.5	0.5	11.3
MIN	56.5	30.8	41.65	47.3	13.5	9.8	-	8.4	0.4	11.1

## Test Center

### 1、Performance Testing

Every fiber optic transceiver is thoroughly tested by the LSOLINK Assurance Program, which is equipped with the world's most advanced analytical equipment to ensure that our transceivers meet the industry's international public protocol standards while still functioning flawlessly in your facility.

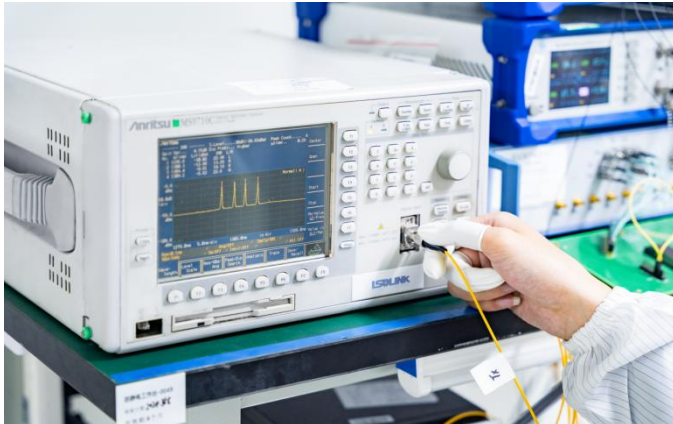

#### Optical Spectrum Inspection

Using the industry's leading optical spectrum analyser to check in real time that the parameters of the optical transceiver's laser comply with industry standards.

- **Peak:** Peak wavelength and peak level
- **2nd Peak:** Side-mode wavelength and level
- **Mean Wl:** Center wavelength
- **Total Power:** Total power of spectrum
- **SMSR:** Side-Mode Suppression Ratio



#### Optical Signal Quality Inspection

Using highly efficient sampling oscilloscopes and BERT testers, equipped with an automated test platform to accurately test the signal quality of the transceiver, test records are kept for up to 5 years to ensure the traceability of each transceiver.

- **Eye Mask Margin(NRZ)**
- **TDECQ(PAM4):** transmitter dispersion eye closure
- **OMA:** Optical modulation amplitude
- **BER:** Bit error rate
- **ER:** Extinction Ratio



#### Flow Pressure Test

Using multi-protocol network traffic analyser with various brands of switches to test the transceiver's ability to transmit at full speed.

- **Bandwidth:** Actual transceiver bandwidth on the port
- **Packet Loss**
- **Packet Errors:** CRC Errors/PCS Errors/Symbol Errors
- **LinkDown Counts**
- **latency**

Above is part of our test bed network equipment. For more information, Please click [download](#) for optical transceiver performance test report.

## 2、Quality Control

We adopt advanced quality management solutions. Each transceiver is self-inspected, including:20x microscope inspection, 200x microscope inspection, and QC process inspection.



visual inspection



Microscopic inspection: 20X



Microscopic inspection: 200X



Reliability Verification



Optical endface inspection




OQC Inspection


## Order Information

Part Number	Description
25G-SFP-SR	25GBASE-SR SFP28 25G 850nm 100m DOM LC MMF Transceiver Module
25G-SFP-LR	25GBASE-LR SFP28 25G 1310nm 10km DOM LC SMF Transceiver Module
25G-SFP-ER	25GBASE-ER SFP28 25G 1310nm 40km DOM LC SMF Transceiver Module
10/25G-SFP-SR	10/25GBASE-SR SFP28 25G Dual rate 850nm 100m DOM LC MMF Transceiver Module
10/25G-SFP-LR	10/25GBASE-LR SFP28 25G Dual rate 1310nm 10km DOM LC SMF Transceiver Module

## Further Information

 | Lighting the Path to Global Links

 **Web** | [www.lsolink.com](http://www.lsolink.com)

 **Email** | For [Sales@lsolink.com](mailto:Sales@lsolink.com)

## Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. LSOLINK assumes no responsibility for the use or reliability of equipment or software not provided by LSOLINK. Copyright LSOLINK.COM All Rights